



betap<sup>®</sup>  
makes your brand



Chromata



Chrómata is the Greek word for colours. Chrómata is the name for our collection of the qualities „base – style – feel“, base is what the word means – the base, style comes in a natural design and gives character to Chrómata and feel gives the warm comfort to our collection.

Chrómata comes in a wide range of beautiful colours. Colours are emotions, colours make our life colourful, colours help to orientate, colours help with communication processes, colours transport additional messages to the recipient. Colours create perception and awareness. Chrómata is just beautiful!

What would the world be without Chrómata?

- *Dimension stability*
- *Sound-absorbing*
- *100% Polyamide pile*
- *Great resilience*
- *Luxurious feel*
- *Wide colour spectrum*

*Through the different colours you can*

- *apply zoning in rooms*
- *differentiate between different functional areas*
- *create spatial orientation*
- and*
- *provide creative variety*















Base colourline



Base 35 orange



Base 80 lavender



Base 81 sky



Base 45 ice



Base 40 lime



Base 15 terra



Base 83 lobelia



Base 82 sea



Base 44 turquoise



Base 41 grass



Base 16 orchid



Base 85 ocean



Base 84 fiord



Base 43 teal



Base 42 emerald



Base 91 cedar



Base 94 panther



Base 78 slate



Base 77 coal



Base 75 stone



Base 90 sisal



Base 92 peat




Base 76 concrete




Base 93 linen



Base 70 oyster



Base 74 clay

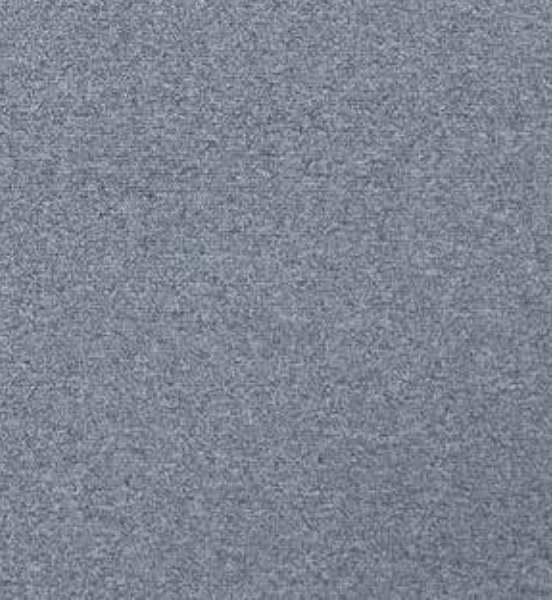

Base 73 silver





Style colourline



Style 35 orange



Style 80 lavender



Style 81 sky



Style 45 ice



Style 40 lime



Style 15 terra



Style 83 lobelia



Style 82 sea



Style 44 turquoise



Style 41 grass



Style 16 orchid



Style 85 ocean



Style 84 fiord



Style 43 teal



Style 42 emerald



Style 91 cedar



Style 94 panther



Style 78 slate



Style 77 coal



Style 75 stone



Style 90 sisal



Style 92 peat



Style 76 concrete



Style 93 linen



Style 70 oyster



Style 74 clay



Style 73 silver





Feel colourline



Feel 35 orange



Feel 80 lavender



Feel 81 sky



Feel 45 ice



Feel 40 lime



Feel 15 terra



Feel 83 lobelia



Feel 82 sea



Feel 44 turquoise



Feel 41 grass



Feel 16 orchid



Feel 85 ocean



Feel 84 fiord



Feel 43 teal



Feel 42 emerald



Feel 91 cedar



Feel 94 panther



Feel 78 slate



Feel 77 coal



Feel 75 stone



Feel 90 sisal



Feel 92 peat



Feel 76 concrete



Feel 73 silver



Feel 93 linen



Feel 70 oyster



Feel 74 clay




# Fitting instructions | Chromata Base

## INSTALLATION

Before installation, check that tiles are from the same dye batch number. Batches should not be mixed in the same location. All floor surfaces should be clean, dry and flat. Tiles should be left at room temperature for at least 24 hours before fitting.

## LAYING DIRECTIONS

Before installation, check that tiles are from the same dye batch number. Batches should not be mixed in the same location. All floor surfaces should be clean, dry and flat. Tiles should be left at room temperature for at least 24 hours before fitting.

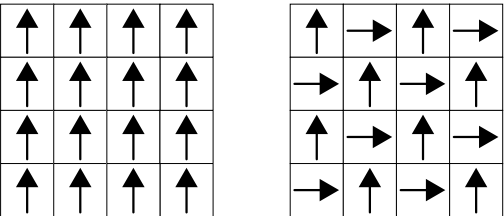

## CUTTING

Cut with a Stanley knife or similar, preferably from the back, then part the surface pile.

## MAINTENANCE

Regular vacuum cleaning is essential. Spills and surface stains can be removed by sponging with a damp cloth, or for more resistant stains, with a mild detergent solution.

It is strongly recommended that a protecting mat i.e. keyhole mat or similar is used under castor chairs. Colours may vary from those shown on the sampling due to the manufacturing process. No claims will be considered as a result of improper application, installation or maintenance. Pile pressure marks shading and soiling are not manufacturing defects. all specifications are approx.

# Specifications | Chromata Base

## TECHNICAL SPECIFICATION

Manufacturing method:	Level loop
Pile type:	Loop pile
Pile fibre:	100% polyamide 6 piece-dyed
Gauge:	1/10"
Pile weight:	600 gr/m²
Pile height:	3.5 mm
Total weight:	4000 gr/m²
Total thickness:	6.3 mm
Tuft density:	244.100/m²
Tile size:	50 x 50 cm
Backing:	Polyflex
Tiles per box:	20

## PERFORMANCE

Use classification:		23 + 33
Caster chair test:	EN 985	A, intensive use
Abrasion:	EN 1963	Pass
Vettermann test:	EN 1471	Pass
Dimensional stability:	EN 986	Pass
Thermal isolation:	ISO 8302	0.0567 m² K/W
Sound absorption:	ISO 140-8	22 dB
Luxery class:		LC2
DOP-nr:		1016-2612
Prodis-nr:		61017F4E

## ELECTROSTATIC



Static loading:		Anti-static
Walking test:	EN 1815	≤ 0.02 KV
Horizontal resistance:	ISO 1096 5	8 x 10. <sup>9</sup> Ohm
Vertical resistance:	ISO 1096 5	4 x 10. <sup>9</sup> Ohm

## FLAMMABILITY

Reaction to fire:	EN ISO 9239-1	Bfl-s1
Reaction to fire:	BS 4790	Medium radius of effect of ignition

## COLOUR FASTNESS

Light:	ISO 105 B02	6.0 - 7.0
Rubbing:	ISO 105 x12	4.0 - 5.0
Water:	ISO 105 E01	4.0 - 5.0

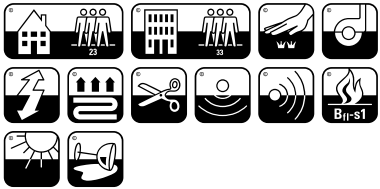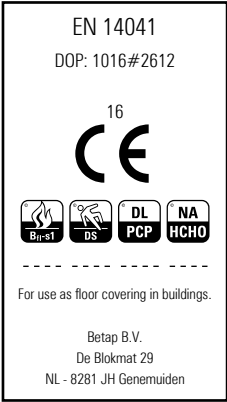

## MAINTENANCE

Regular vacuum cleaning is essential. Spills and surface stains can be removed by sponging with a damp cloth, or for more resistant stains, with a mild detergent solution.

All rights reserved to alter technical specifications.




# Fitting instructions | Chromata Style

## INSTALLATION

Before installation, check that tiles are from the same dye batch number. Batches should not be mixed in the same location. All floor surfaces should be clean, dry and flat. Tiles should be left at room temperature for at least 24 hours before fitting.

## LAYING DIRECTIONS

Before installation, check that tiles are from the same dye batch number. Batches should not be mixed in the same location. All floor surfaces should be clean, dry and flat. Tiles should be left at room temperature for at least 24 hours before fitting.

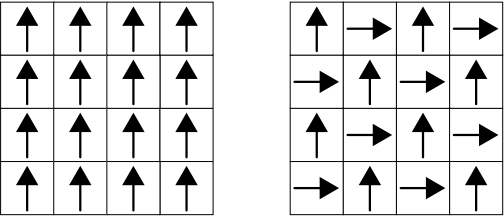

## CUTTING

Cut with a Stanley knife or similar, preferably from the back, then part the surface pile.

## MAINTENANCE

Regular vacuum cleaning is essential. Spills and surface stains can be removed by sponging with a damp cloth, or for more resistant stains, with a mild detergent solution.

It is strongly recommended that a protecting mat i.e. keyhole mat or similar is used under castor chairs. Colours may vary from those shown on the sampling due to the manufacturing process. No claims will be considered as a result of improper application, installation or maintenance. Pile pressure marks shading and soiling are not manufacturing defects. all specifications are approx.

# Specifications | Chromata Style

## TECHNICAL SPECIFICATION

Manufacturing method:	Design tufted
Pile type:	Loop pile
Pile fibre:	100% polyamide 6 piece-dyed
Gauge:	1/10"
Pile weight:	650 gr/m²
Pile height:	3.0 - 6.0 mm
Total weight:	4200 gr/m²
Total thickness:	5.8 - 8.8 mm
Tuft density:	177.200/m²
Tile size:	50 x 50 cm
Backing:	Polyflex
Tiles per box:	20

## PERFORMANCE

Use classification:		23 + 33
Caster chair test:	EN 985	A, intensive use
Abrasion:	EN 1963	Pass
Vettermann test:	EN 1471	Pass
Dimensional stability:	EN 986	Pass
Thermal isolation:	ISO 8302	0.0672 m² K/W
Sound absorption:	ISO 140-8	26 dB
Luxury class:		LC2
DOP-nr:		1016-2612
Prodis-nr:		7D6C94A0

## ELECTROSTATIC



Static loading:		Anti-static
Walking test:	EN 1815	≤ 0.02 KV
Horizontal resistance	ISO 1096 5	8 x 10. <sup>9</sup> Ohm
Vertical resistance	ISO 1096 5	4 x 10. <sup>9</sup> Ohm

## FLAMMABILITY

Reaction to fire:	EN ISO 9239-1	Bfl-s1
Reaction to fire:	BS 4790	Medium radius of effect of ignition

## COLOUR FASTNESS

Light:	ISO 105 B02	6.0 - 7.0
Rubbing:	ISO 105 x12	4.0 - 5.0
Water:	ISO 105 E01	4.0 - 5.0

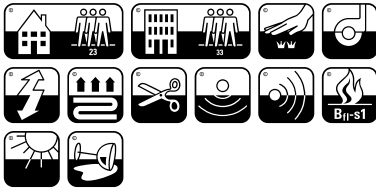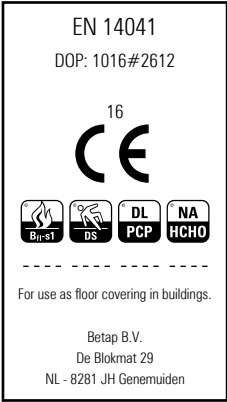

## MAINTENANCE

Regular vacuum cleaning is essential. Spills and surface stains can be removed by sponging with a damp cloth, or for more resistant stains, with a mild detergent solution.

All rights reserved to alter technical specifications.




# Fitting instructions | Chromata Feel

## INSTALLATION

Before installation, check that tiles are from the same dye batch number. Batches should not be mixed in the same location. All floor surfaces should be clean, dry and flat. Tiles should be left at room temperature for at least 24 hours before fitting.

## LAYING DIRECTIONS

Before installation, check that tiles are from the same dye batch number. Batches should not be mixed in the same location. All floor surfaces should be clean, dry and flat. Tiles should be left at room temperature for at least 24 hours before fitting.

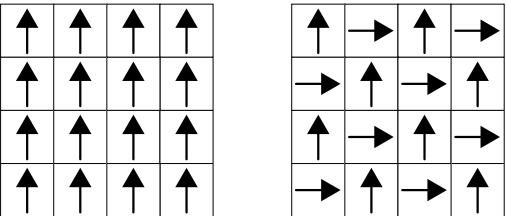

## CUTTING

Cut with a Stanley knife or similar, preferably from the back, then part the surface pile.

## MAINTENANCE

Regular vacuum cleaning is essential. Spills and surface stains can be removed by sponging with a damp cloth, or for more resistant stains, with a mild detergent solution.

It is strongly recommended that a protecting mat i.e. keyhole mat or similar is used under castor chairs. Colours may vary from those shown on the sampling due to the manufacturing process. No claims will be considered as a result of improper application, installation or maintenance. Pile pressure marks shading and soiling are not manufacturing defects. all specifications are approx.

# Specifications | Chromata Feel

## TECHNICAL SPECIFICATION

Manufacturing method:	Shaggy
Pile type:	Cut pile
Pile fibre:	100% polyamide 6 piece-dyed
Gauge:	5/16"
Pile weight:	1200 gr/m <sup>2</sup>
Pile height:	21.0 mm
Total weight:	4710 gr/m <sup>2</sup>
Total thickness:	23.8 mm
Tuft density:	42.840/m <sup>2</sup>
Tile size:	50 x 50 cm
Backing:	Polyflex
Tiles per box:	16

## PERFORMANCE

Use classification:		23 + 33
Caster chair test:	EN 985	B, occasional use
Abrasion:	EN 1963	Pass
Vettermann test:	EN 1471	Pass
Dimensional stability:	EN 986	Pass
Thermal isolation:	ISO 8302	0.157 m² K/W
Sound absorption:	ISO 140-8	28 dB
Luxery class:		LC4
DOP-nr:		1016-2612
Prodis-nr:		4EAAA9D4

## ELECTROSTATIC



Static loading:		Anti-static
Walking test:	EN 1815	≤ 0.02 KV
Horizontal resistance:	ISO 1096 5	2.2 x 10. <sup>11</sup> Ohm
Vertical resistance:	ISO 1096 5	1.4 x 10. <sup>10</sup> Ohm

## FLAMMABILITY

Reaction to fire:	EN ISO 9239-1	Bfl-s1
Reaction to fire:	BS 4790	Low radius of effect of ignition

## COLOUR FASTNESS

Light:	ISO 105 B02	5.0
Rubbing:	ISO 105 x12	4.0 - 5.0
Water:	ISO 105 E01	4.0 - 5.0

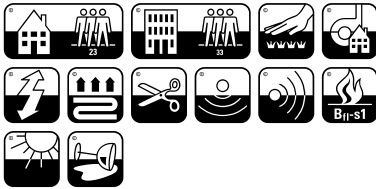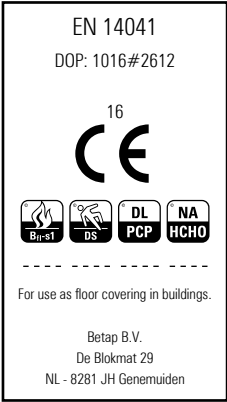

## MAINTENANCE

Regular vacuum cleaning is essential. Spills and surface stains can be removed by sponging with a damp cloth, or for more resistant stains, with a mild detergent solution.

All rights reserved to alter technical specifications.





Betap Tufting BV  
P.O. Box 119, 8280 AC Genemuiden  
The Netherlands  
T +31(0)38 386 10 60  
E [centralmail@betap.com](mailto:centralmail@betap.com)  
I [www.betap.com](http://www.betap.com)